

The R-1308 Auxiliary Readout


Lightweight auxiliary readout that attaches directly to Hamar Laser's A-1519-2.4ZB and A-1520-2.4ZB Targets

Readout Features

- Single-axis readout connects directly to the auxiliary (AUX) port on the side of the A-1519-2.4ZB and A-1520-2.4ZB Wireless Targets.
- User-selectable display allows the target position to be viewed in either inches or millimeters.
- Display shows readings in either Relative (Zero) or Absolute mode.
- Bright numeric LED display with a resolution of four decimal places (0.0000) for easy viewing of target readings.
- Unit slides on the post of the magnetic base supplied with the target.
- Provides a useful backup for the R-1355.2.4ZB.
- Disables target radio, providing a good solution for users who have difficulty with radio communication.
- Small and light weight with a sturdy housing.



The R-1308 Auxiliary Readout attaches to the magnetic base post of Hamar Laser's Type II Wireless Unitargets (A-1519-2.4ZB and A-1520-2.4ZB) and operates using a direct connection to the target.

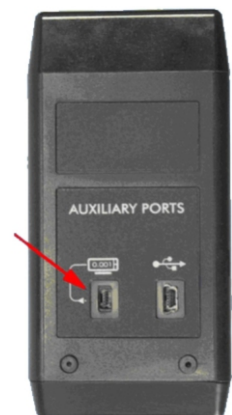

5 Ye Olde Road, Danbury, CT 06810 USA
Phone: (800) 826-6185 or +1-203-730-4600 • Fax: +1-203-730-4611
E-mail: sales@hamarlaser.com • Internet: <http://www.hamarlaser.com>
For a list of our distributors, please visit: http://www.hamarlaser.com/intl_distributors.htm